




TECHNICAL DATA

- Internal & External Sensor
- Max. Continuous Load: < 50 mA /10 W
- Max. inrush current (actuator)
- Power Consumption: <= 0,5 W
- Temp. Setting Range: +5 °C to 30 °C
- Ambient Temp. Storage: 0°C to 50 °C
- Ambient Temp. In Application: = 0,5 W
- Sensor Type: 10 kΩ, NTC
- Protection Class: IP20
- Housing: ABS+PC
- 3m Floor Sensor Included
- 2 Year Warranty

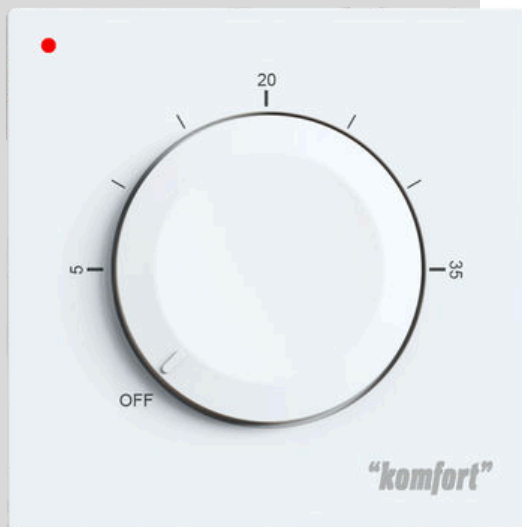

SMART THERMOSTAT

OVERVIEW

This is a straightforward electronic analogue thermostat, designed for easy wall mounting. It features a single dial to adjust the temperature, Additionally, it includes an LED indicator that displays heating periods. This simple thermostat is ideal for controlling thermal actuators or voltage-free devices such as gas boilers or water heat pumps.

KEY FEATURES

- Convenient Dial Operation..
- Change-over Input, CO Input.
- Heating and Cooling mode via CO Input.
- Frost Protection.
- CE, RoHS and 2 Year Warranty.

CONTACT US



+44 1600 731555



sales@komfort-ufh.co.uk



Monmouth, NP25 3QG