




## TECHNICAL DATA

- Total Dimensions: L1200 x W600 x H16mm
- Compression Strength: XPS 400kPa
- Pipe Centres: 150mm
- Suitable Pipe Size: 12mm
- Water Absorption: 0.6%
- Temperature Range: -50°C to 70°C
- Fire Performance: Class 0 / Euro Classification E
- Thermal conductivity: 0.034W/mK
- USP: Omega grooves for easy installation.
- Suitable Floor Coverings: Directly lay marble, tiles and stone or self levelling compounds (10mm) for other floor coverings.

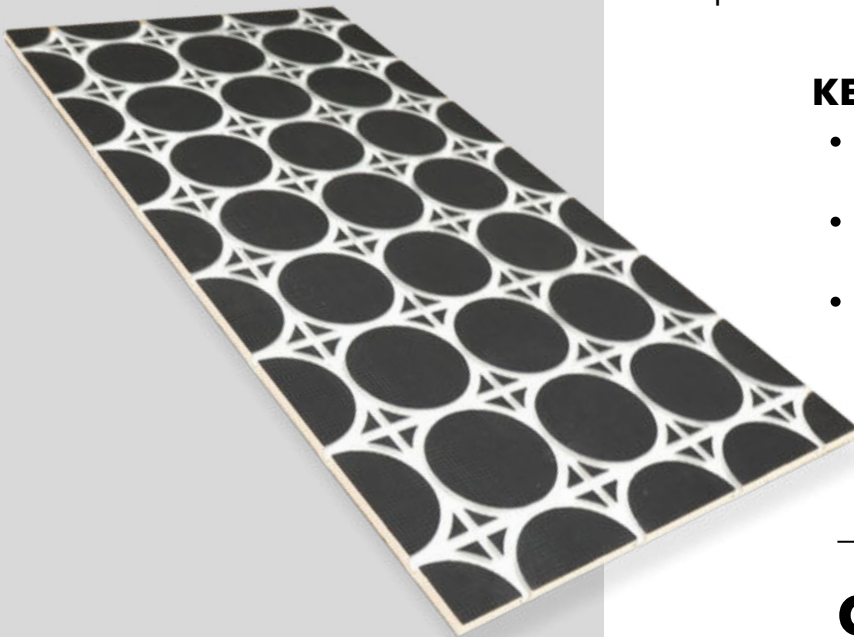

# 16mm XPS CEMENT BOARD

## OVERVIEW

Introducing the Komfort KOC-CR Cement XPS Overlay Panel which are designed to provide superior insulation and support for underfloor heating systems. Available in a 16mm thicknesses, these boards are made from 400 KPA extruded polystyrene (XPS), offering excellent thermal insulation and compressive strength. Both sides of the board are coated with a durable cement layer, providing a stable surface suitable for direct application of marble, stone and tiles or levelling compounds for other floor coverings.

## KEY FEATURES

- High-density extruded polystyrene with reinforced cement coating.
- Excellent impact and compressive strength.
- Can be easily cut using conventional tools.

## CONTACT US



+44 1600 731555



[sales@komfort-ufh.co.uk](mailto:sales@komfort-ufh.co.uk)



Monmouth, NP25 3QG